

FRECAN


TR 10 SLIM 1000

TR 10 SLIM 1200

NO INSTALE DIRECTO SOBRE PLACAS DE PLADUR

DON'T INSTALL DIRECTLY INTO DRYWALL PLADUR

1

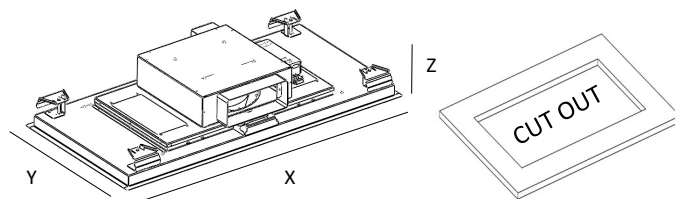


FALSO TECHO REFORZADO PARA SOPORTAR MIN (34KG)

FALSE CEILING REINFORCED TO SUPPORT MIN (34 KG)


	X (mm)	Y (mm)	Z (mm)	CUT OUT (mm)
TR 10 1000	1000	500	170	970 X 475
TR10 1200	1200	700	170	1170 X 675

2

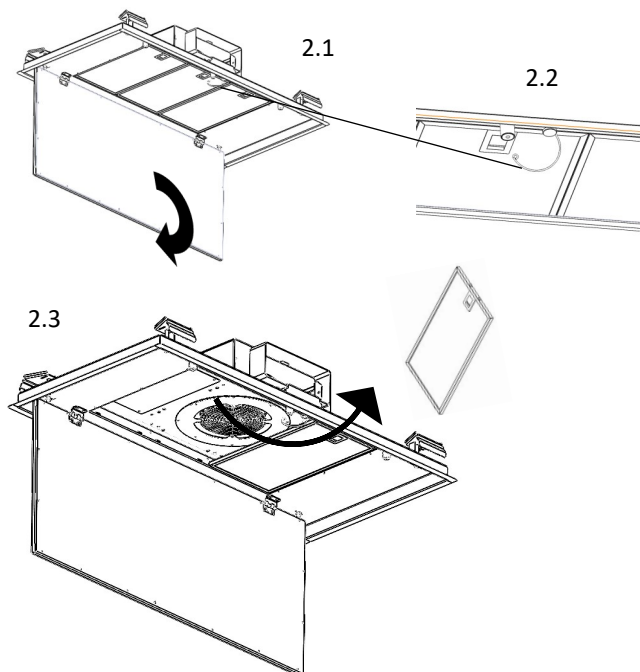


3


3.1

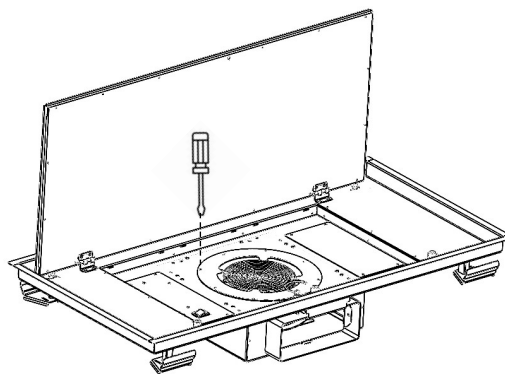


3.2

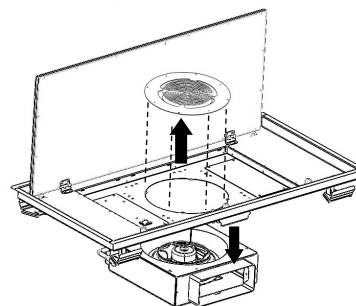

4

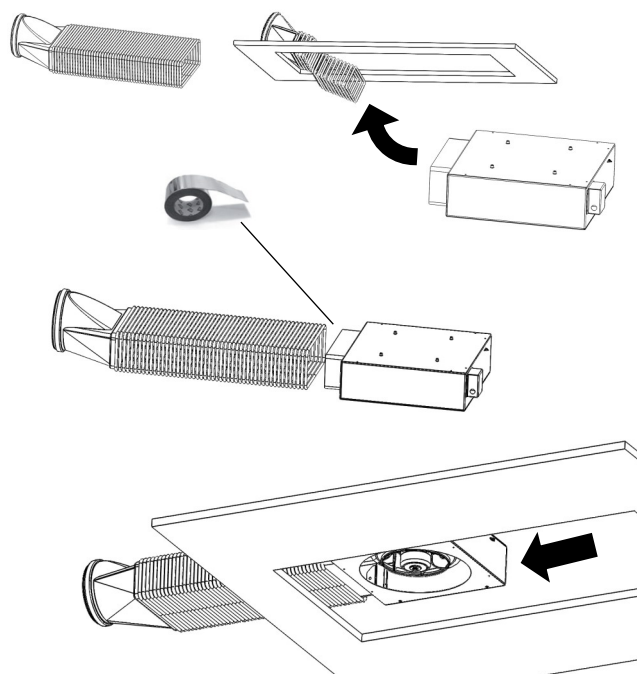


5

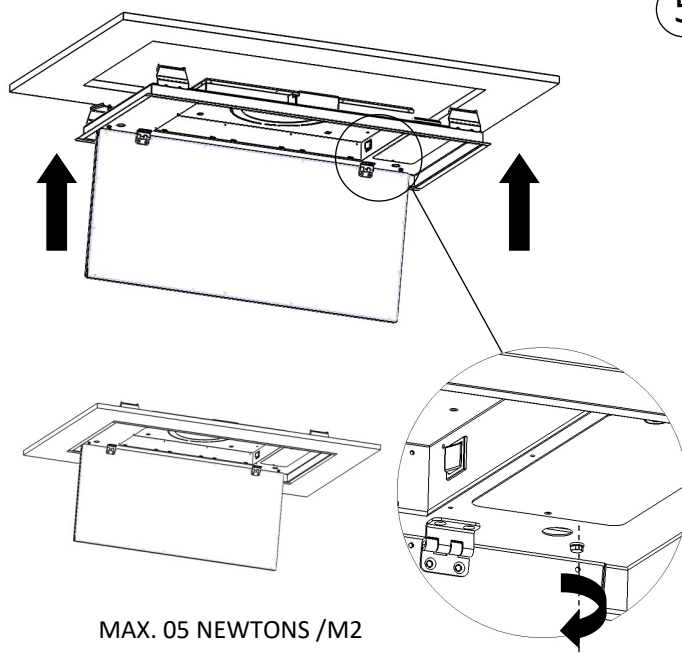


MAX. 05 NEWTONS /M2


6

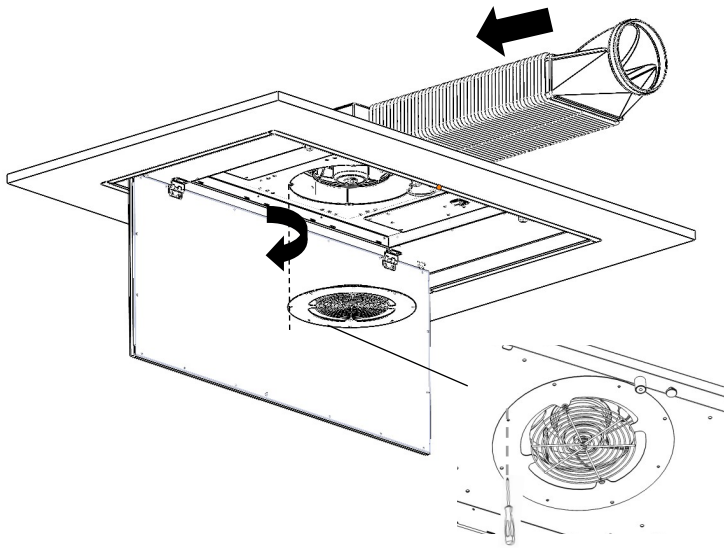


7

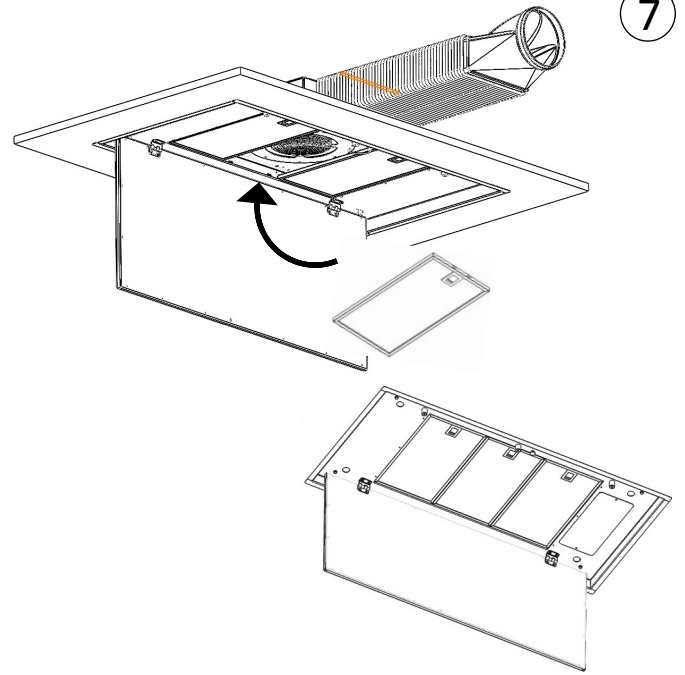

8

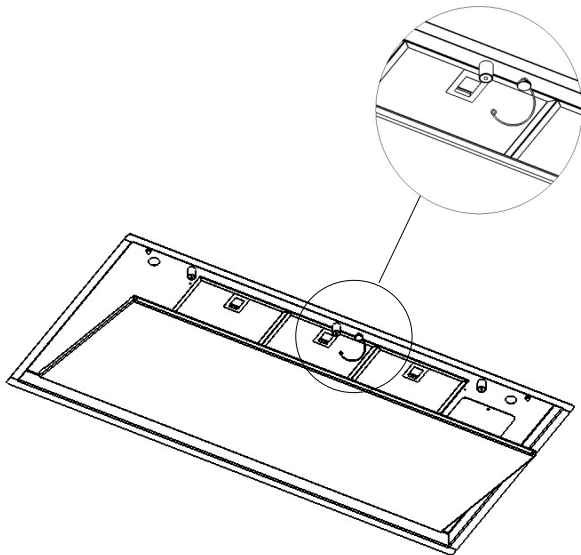


9

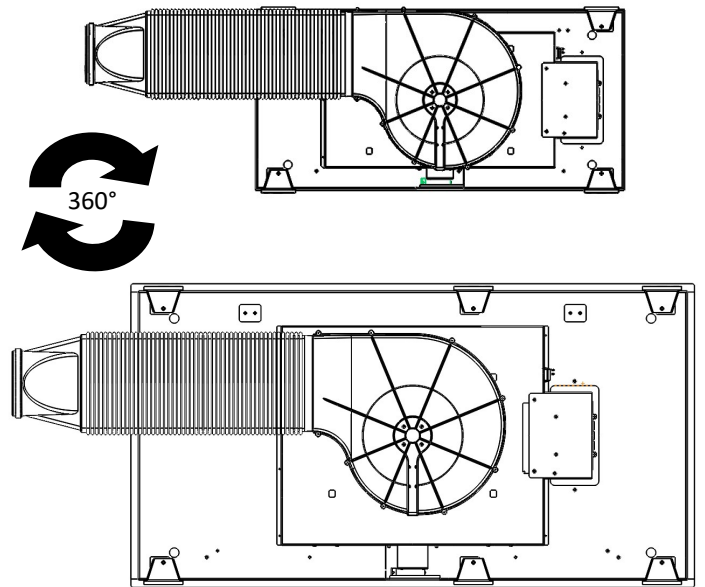

10

TR 10 1000

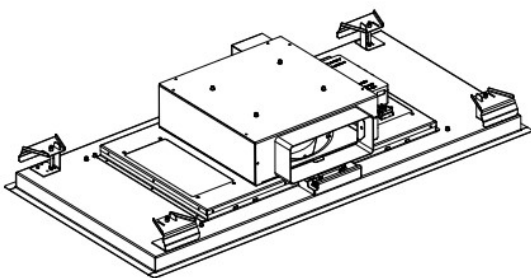

11

TR 10 1200

